

Status: 07/2026



Products need labeling

Label printers
with highest operating comfort



eos

Made in Germany

Types

One concept, two sizes

The EOS series combines all functions of a solid label printer with highest operating comfort.

1.1



eos2, the compact one

for label roll diameters up to 152 mm

Label printer		EOS 2	
Printable resolution	dpi	203	300
Print speed	up to mm/s	150	150
Print width	up to mm	108	105.7
Label roll diameter	up to mm	152	152
Power supply		100 - 240 VAC, 50/60 Hz	

1.2



eos5 for large label rolls

with diameters up to 203 mm

Label printer		EOS 5	
Printable resolution	dpi	203	300
Print speed	up to mm/s	150	150
Print width	up to mm	108	105.7
Label roll diameter	up to mm	203	203
Power supply		100 - 240 VAC, 50/60 Hz	

Mobile printing

in production, warehousing or agriculture, wherever labels are required and access to electricity is missing. 24 V input voltage enable the printer to be power supplied by any powerful battery. For technical battery data see accessories

1.3



eos2 mobile

for label roll diameters up to 152 mm

Label printer		EOS 2 mobile	
Printable resolution	dpi	300*	
Print speed	up to mm/s	150	
Print width	up to mm	105.7	
Label roll diameter	up to mm	152	
Power supply		16.5 - 25 VDC	

1.4



eos5 mobile

for label roll diameters up to 203 mm

Label printer		EOS 5 mobile	
Printable resolution	dpi	300*	
Print speed	up to mm/s	150	
Print width	up to mm	105.7	
Label roll diameter	up to mm	203	
Power supply		16.5 - 25 VDC	

*203 dpi on request

Details



To achieve accurate imprint with slim materials and ribbons, slim print rollers are needed. These prevent from print roller wear, print head contamination and errors during material feed.

1 Roll holder

The label roll is inserted and automatically centered when closing.

2 Ribbon holder

The stop can be adjusted according to the ribbon width.

3 Print head 203 / 300 dpi

In case of cleaning or wear, the print head can be replaced easily by hand without tools.

4 Label sensor - gap or reflective

The sensor position can be adjusted via a spindle using the red rotary knob. The chosen position is indicated by a LED.

5 Print roller DR4

In case of cleaning or wear, the print roller can be replaced without tools.

6 Material guide

Using the rotary knob, the guides can be adjusted to the material width

7 Tear-off plate

made of thin sheet steel; jagged, so labels are cleanly separated

Operation panel

Intuitive and easy operation with self-explanatory symbols to configure the device setups

- 1 LED signal:** Power ON
- 2 Status bar:** Data reception, Record data stream, Ribbon pre-warning, SD memory card / USB memory stick, WLAN, Ethernet, USB slave, Time
- 3 Printer status:** Ready, Pause, Number of printed labels per print job, Label in peel-off position, Awaiting external start signal
- 4 USB port** for the Service Key or a memory stick, to load data in the IFFS storage
- 5 Operation:**
 - Cutter / perforation cutter
 - Tear-off mode
 - Jump to menu
 - Stop and delete all print jobs
 - Reprint
 - Label feed
 - Suspend and continue a print job



Interfaces on the back of the device



1 Slot for a SD memory card

2 x USB host to connect a Service Key, USB memory stick, keyboard, barcode scanner, USB WLAN stick, external control panel

3 USB 2.0 Hi-speed Device to connect a PC

4 Ethernet 10/100 Mbit/s

5 RS232C 1,200 to 230,400 baud/8 bit

Technical data

● typical ■ standard □ option

			1.1		1.2		1.3		1.4	
Label printer			EOS 2		EOS 5		EOS 2 mobile		EOS 5 mobile	
Material feed			centered							
Printing method	Thermal transfer		●		●		●		●	
	Thermal direct		●		●		●		●	
Printable resolution		dpi	203	300	203	300	300		300	
Print speed		up to mm/s	150	150	150	150	150		150	
Print width		up to mm	108	105.7	108	105.7	105.7		105.7	
Print length		up to mm	13,500	6,000	13,500	6,000	6,000		6,000	
Start of printing	Distance to locating edge	mm	centered							
Material ¹⁾										
Paper, cardboard, plastics PET, PE, PP, PI, PVC, PU, acrylate, Tyvec			●		●		●		●	
Shrink tubes	ready-for-use		●		●		-		-	
	continuous, pressed		●		●		-		-	
Textile tapes			●		●		●		●	
Packing	on rolls, reels		●		●		●		●	
	Fanfold		□		□		-		-	
	Roll diameter	up to mm	152		203		152		203	
	Core diameter	mm	38.1 - 76							
	Winding		outside or inside							
Labels	Width single-lane	mm	10 - 116							
	multi-lane	mm	5 - 116							
	Height excl. label backfeed	from mm	5							
	incl. label backfeed	from mm	12							
Liner material	Thickness	mm	0.05 - 0.6							
	Width	mm	25 - 120							
	Thickness	mm	0.03 - 0.16							
Continuous material	Width	mm	5 - 120							
	Thickness	mm	0.03 - 0.5							
	Weight (cardboard)	up to g/m²	180							
Shrink tubes	Width ready-for-use	up to mm	120							
	continuous, pressed	mm	5 - 85							
	Thickness	up to mm	1.1							
Ribbon ²⁾	Ink side		outside or inside							
	Roll diameter	up to mm	72							
	Core diameter	mm	25.4							
	Variable length	up to m	360							
	Width	mm	25 - 114							
Printer sizes and weights										
Width x Height x Depth		mm	253 x 191 x 322		264 x 247 x 412		253 x 191 x 322		264 x 247 x 412	
Weight		kg	4		5		4		5	
Label sensor indicating the position										
Gap sensor		for	labels or punch marks and end of material, print marks on transparant materials							
Reflective sensor		reflex from below or top	for		labels and end of material, print marks on non-transparent materials					
Distance of sensor		from centre to locating edge	centered mm		0 - 58					
Material passage		up to mm	4							
Electronics										
Processor 32 bit clock rate		MHz	800							
Main memory (RAM)		MB	256							
Data memory (IFFS)		MB	50							
Slot to connect a SD memory card (SDHC, SDXC)		up to GB	512							
Battery for time and date, real-time clock			■							
Data memory when power is switched off (e.g. serial numbering)			■							
Interfaces										
RS232C 1,200 to 230,400 baud/8 bit			■							
USB 2.0 Hi-speed device to connect a PC			■							
Ethernet 10/100 Mbit/s			IPv4 / IPv6 static IP / DHCP · IEEE 802.1X							
2 x USB host on the control panel, 2 x USB host on the back of a unit			Service Key, USB stick, USB WLAN stick, USB WLAN stick with a rod antenna, keyboard, barcode scanner, external control panel							
USB WLAN stick 2.4 GHz 802.11b/g/n 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac, rod antenna			hotspot mode or infrastructure mode		□					
Peripheral connection USB host, 24 VDC			■							
Operating data										
Power supply			100 - 240 VAC, 50/60 Hz				24 VDC			
Power consumption			Standby <5 W / typical 45 W / max. 100 W							
Temperature / humidity		Operation	+5 - 40°C / 10 - 85 %, not condensing							
		Stock	0 - 60°C / 20 - 85 %, not condensing							
		Transport	-25 - 60°C / 20 - 85 %, not condensing							
Approvals			CE, UKCA, FCC Class A, ICES-3, cULus, CB, CCC, BIS, BSMI, KC-Mark, Mexico Reg.				CE, UKCA, FCC Class A, ICES-3			
Operation panel										
Colored LCD touch display		Screen diagonal	"							
		Resolution Width x Height	px							
			4.3 272 x 480							

¹⁾ The material specifications are standard values. Applications with small labels, thin, slim, thick and stiff materials as well as strongly adherent labels have to be tested.

²⁾ The ribbon should at least correspond with the width of the liner material.

Technical data

■ standard □ option

Setup options		
	Print Labels Ribbon Tear-off Cut Interfaces Error	Region: - Language - Country - Keyboard - Time zone Time Display: - Brightness - Power saving mode - Orientation Interpreter
Status bar		
	Data reception Record data stream Ribbon pre-warning SD memory card plugged USB memory stick plugged	WLAN Ethernet USB slave Time
Monitoring		
	Ribbon pre-warning End of ribbon End of material	Periphery error Print head voltage Print head temperature Print head open
Test routines		
System diagnostics	on start-up, including print head detection	
Information display, test printout, analysis	Status printout Fonts list List of devices WLAN status	Test grid Label profile List of events Monitor mode
Status reports	- Printout of device settings, e.g. print lengths and service hours - Device status request by software command - Display of, e.g., network errors, no links, barcode errors, periphery errors, etc.	
Fonts		
Font types internally provided	5 bitmap fonts: 12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B	7 vector fonts: AR Heiti Medium GB-Mono CG Triumphvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold
to be stored	TrueType fonts	
Character sets	Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869 EBCDIC 500 ISO 8859-1 to -10 and -13 to -16 WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Chinese simplified Chinese traditional Thai	Cyrillic Greek Latin Hebrew Arabic
Bitmap fonts	Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 270°	
Vector / TrueType fonts	Size in width and height 0,9 - 128 mm Variable zoom Orientation 360° in steps of 1°	
Font styles	bold, italic, underlined, outline, inverse - depending from the font types	
Character spacing	variable or monospace	

Graphics			
Graphic elements		Lines, arrows, rectangles, circles, ellipses - filled or filled with fading	
Graphic formats		PCX, IMG, BMP, TIF, MAC, GIF, PNG	
Codes			
1D barcodes (linear)		Code 39, Code 93 Code 39 Full ASCII Code 128 A, B, C EAN 8, 13 EAN/UCC 128/GS1-128 EAN/UPC Appendix 2 EAN/UPC Appendix 5 FIM HIBC	Interleaved 2/5 Ident and routing code of Deutsche Post Codabar JAN 8, 13 MSI Plessey Postnet RSS 14 UPC A, E, E0
2D and stacked codes		DataMatrix DataMatrix Rectangle Extension QR code Micro QR code rMQR code GS1 QR code GS1 DataMatrix GS1 Digital Link (QR and DataMatrix) PDF 417 Micro PDF 417 UPS MaxiCode GS1 DataBar Aztec Codablock F Dotcode RSS 14 truncated, limited, stacked, stacked omni-directional All codes are variable in terms of height, modular width and ratio; orientations 0°, 90°, 180°, 270° check digit, plain text printout and start / stop code are options depending from the type of code	
Software			
Label software		cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print	■ ■ □ □
Also running	with	CODESOFT Software Spectrum NiceLabel BarTender	■
Stand-alone operation			■
Windows printer drivers certified WHQL for	Windows 10 Windows 11	Server 2016 Server 2019 Server 2022 Server 2025	■
Apple printer drivers	Mac OS X 10.6 or any later release		■
Linux printer drivers	CUPS 1.2 or any later release		■
Programming	JScript printer language abc Basic Compiler ZPL II (Datastream be tested in advance)		■ ■ □
Integration	SAP Database Connector		■ ■
Administration	Printer control Configuration in Intranet and Internet		■ ■

cab uses free and Open Source Software in its products.
For information see www.cab.de/opensource

Printer control and administration


Label software



cablabel S3

It opens up the full potential of cab devices. Modular design allows adaptation in steps to individual demands. Plug-ins are embedded. Native JScript programming, for example, is supported by a JScript Viewer. The designer user interface and JScript codes synchronize in real time. Optional features can be integrated, such as the Database Connector or barcode verifiers.

See further information on www.cab.de/en/cablabel

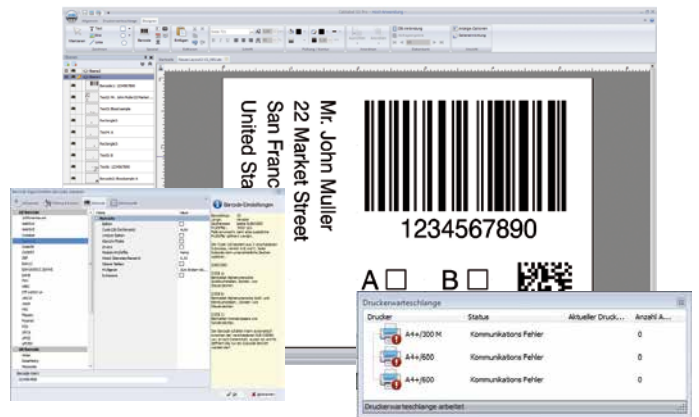

Stand-alone operation

This operating mode enables a printer select and print labels while not connected to a host system. Labels can be designed using software such as cablabel S3 or a text editor on a PC. Label formats, texts, graphics and data of a database can be stored on external memory media or a printer's internal IFFS memory. Variable data are sent via a keyboard, a barcode scanner, a weighing system or any other host to a printer, and / or recalled from a host using the Database Connector and printed.



Printer control and administration

Printer drivers



cab provides drivers to control a printer with software other than cablabel S3. Free download on www.cab.de/en/support

Programming



JScript
cab has developed the embedded JScript programming language to control a printer. Manual on www.cab.de/en/programming



abc Basic Compiler
Integral to a firmware, it in addition to JScript enables advanced programming before data are edited for printing. For example, external printer languages can be replaced without intervening in a printing process in progress. Data may be imported as well from other systems such as scales, barcode scanners or PLC.

Connecting to SAP®

Labels can be printed from SAP¹⁾ on cab devices and systems. There are various methods:

- Printing with SAPscript
- Printing with SmartForms
- Printing with Adobe Interactive Forms

See instructions on www.cab.de/en/sap

Database



Database Connector

Printers in a network may access data from a ODBC / OLEDB database and print it on labels.

Data can be rewritten to a database while print jobs are in progress.

¹⁾ SAP and associated logos are trademarks or registered trademarks of SAP SE.

²⁾ SQUIX only

Network integration

Protocol / service	Feature / possibilities
RawIP	Direct print job submission via TCP (configurable port, 9100 default); easy integration with spoolers and host systems
LPD / LPR	Classic Unix / Windows print queue service for submitting and checking print job status
FTP / FTPS	Automatic print job transfer and execution, as well as access to memory (labels, images, fonts, firmware updates)
HTTP / HTTPS	Web-based configuration, status monitoring, firmware updates
WebDAV	Inclusion of central WebDAV server directories (containing stored print data) using the integral WebDAV client
SOAP web service	API for printer control and status queries via a standardized WSDL description
SNMP v2	Monitoring via standard printer MIB OIDs and traps for events (paper ending, error, maintenance)
SMTP	Emails as notification on events (errors, maintenance, status)
PJL	Printer Job Language: status and control commands within a print data stream
OPC-UA / OPC-UA DI	Industrial API for printer control and monitoring, device information companion specification included
SOTI Connect²	Cloud-based, thus centralized management of printer fleets
VPSX (LRS)	Integration with LRS VPSX output management for enterprise-wide print spooling
VNC	Remote access to a printer's operation panel for viewing and controlling per network
Avahi / mDNS / Zeroconf	Automatic service discovery (Bonjour-compatible) for driverless detection in a local network

Accessories for all types of devices

2.3  	Print roller DR4-30 Material width up to 30 mm; synthetic rubber coating for accurate imprint Print roller DR4-60 Material width up to 60 mm; synthetic rubber coating for accurate imprint
2.4  	External operation panel If the operation panel of a printer cannot be accessed, an additional external one can be plugged. Same functionality as on the printer Landscape or portrait mode Operability as desired on the external operation panel or on the printer Printer connectivity: USB 2.0 Hi-Speed device cab provides specified connecting USB cables for power supply. Lengths are 1.8 m to 16 m.

2.5 	SD memory card
2.6 	USB memory stick
2.7 	USB WLAN stick 2.4 GHz 802.11b/g/n
2.8 	USB WLAN stick 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac in infrastructure mode with rod antenna for extended reach
2.10 	Label selection - I/O box Up to 16 different labels per box can be selected from the memory card by a master control, e.g. PLC. Two boxes can be connected. The I/O box allows simple PLC control processes with four inputs and outputs each via abc programming.
3.1 	Connecting cable RS232 C 9/9 pin, length 3 m



Cutter

All printable materials can be cut.

The cutter can be pivoted to exchange the material.

Technical data		Cutter for EOS 2, EOS 5
Material Width	mm	120
Weight cardboard	gr/m ²	60 - 240
Thickness	mm	0.05 - 1.1
Cutting length	from mm	10
Gap height	up to mm	2.5
Cuts/min	up to	200
Label winding		preferably outside
Monitoring		Cutter pivoted, final cutter position has not been reached



Cutter and perforation cutter

Continuous materials such as textiles or shrink tubes are perforated before they are manually separated.

In addition, the materials can also be cut.

The cutter can be pivoted to exchange the material.

Technical data		Cutter and perforation cutter for EOS 2, EOS 5
Perforating	Web distance mm	2.5
	Web width mm	0.8
Material Width	mm	45
Weight cardboard	gr/m ²	60 - 240
Thickness	mm	0.05 - 1.1
Cutting length	from mm	10
Gap height	up to mm	2.5
Cuts/min	up to	200
Label winding		preferably outside
Monitoring		Cutter pivoted, final cutter position has not been reached

Accessories

5.1



External unwinder

When inserted, the material rolls are automatically centered. The unwinder cannot be installed with EOS mobile.

Technical data		External unwinder for EOS 2, EOS 5
Roll diameter	up to mm	390
Core diameter	from mm	38
Winding		outside or inside
Roll weight	up to kg	4

5.2



Brake for fanfold labels

for EOS 2 and EOS 5. The fanfold material is tightly fed in the printer and printed precisely. The brake cannot be installed with EOS mobile.

6.1



Battery pack

with a charger unit already included for mobile operation. It is installed under EOS mobile. Per battery capacity, a maximum of 500 print jobs with a label size of 100 x 68 mm and 15 per cent density may be processed.

Technical data		Battery pack 2 for EOS 2, EOS 5
Nominal voltage	V	18
Capacity	Ah	2.1
Power	Wh	36
Charging time	approx. h	2
Charging voltage		100 - 240 VAC, 50/60 Hz
Dimensions W x H x D	mm	221 x 58 x 270
Weight	kg	2.5

Delivery program

Pos.		Part no.	Printers
1.1		5978201	Label printer EOS 2/200
		5978202	Label printer EOS 2/300
1.2		5978211	Label printer EOS 5/200
		5978212	Label printer EOS 5/300
1.3		5978202.600	Label printer EOS 2 mobile/300
1.4		5978212.600	Label printer EOS 5 mobile/300
Scope of delivery			
Label printer Power cable Type E+F, length 1.8 m Connecting cable USB, length 1.8 m Instructions DE / EN			
Provided online			
 Instructions in 30 languages Configuration manual DE / EN / FR Service manual DE / EN Spare parts list DE / EN Programming manual EN https://setup.cab.de/en Windows printer drivers certified WHQL for Windows 10 Server 2016 Windows 11 Server 2019 Server 2022 Server 2025 Apple Mac OS X printer drivers DE / EN / FR Linux printer drivers DE / EN / FR Label software cablabel S3 Lite cablabel S3 Viewer Database Connector			
Pos.		Part no.	Wear parts
2.1		5966096.001	Print head 200 dpi
		5965580.001	Print head 300 dpi
2.2		5965488.001	Print roller DR4
Pos.		Part no.	Accessories
2.3		5966218.001	Print roller DR4-30
		5966219.001	Print roller DR4-60

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee.



Information is also available on the Internet:
www.cab.de/en/eos

Pos.		Part no.	Accessories
2.4		6010186	External operation panel
		5907718.001	Connecting cable USB, 1.8 m
		5907730.001	Connecting cable USB, 3 m
		5907750.001	Connecting cable USB, 5 m
		5907760.001	Connecting cable USB, 11 m
2.5		5907765.001	Connecting cable USB, 16 m
		5977370	SD memory card
		5977730	USB memory stick
		5978912.001	USB WLAN stick 2.4 GHz 802.11b/g/n
		5977731	USB WLAN stick with rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac
2.8			
2.10		5948205	Label selection - I/O box
3.1		5550818	Connecting cable RS232 C 9/9 pin, length 3 m
4.1		5965520 5966730	Cutter EOS 2 Cutter EOS 5
4.2		5965910 5969891	Cutter and perforation cutter EOS 2 Cutter and perforation cutter EOS 5
5.1		5965586	External unwinder EOS
5.2		5953753	Brake for fanfold labels EOS
6.1		5542640 5542660	Battery pack 2 EOS 2 Battery pack 2 EOS 5
Pos.		Part no.	Label software
11.7		Bundle	cablabel S3 Lite (Download at cab.de/en)
		5588001	cablabel S3 PRO 1 WS
		5588100	cablabel S3 PRO 5 WS
		5588101	cablabel S3 PRO 10 WS
		5588150	cablabel S3 PRO 1 add. licence
		5588151	cablabel S3 PRO 4 add. licences
		5588152	cablabel S3 PRO 9 add. licences
		5588002	cablabel S3 Print 1 WS
		5588105	cablabel S3 Print 5 WS
		5588106	cablabel S3 Print 10 WS
		5588155	cablabel S3 Print 1 add. licence
		5588156	cablabel S3 Print 4 add. licences
		5588157	cablabel S3 Print 9 add. licences
11.10		in preparation	cablabel S3 Print Server
		9008486	Programming manual EN, printed copy

Overview of cab products

Label printers
MACH1, MACH2



Label printers
EOS 2



Label printers
EOS 5



Label printers
MACH 4S



Label printers
SQUIX 2



Label printers
SQUIX 4



Label printers
SQUIX 6.3



Label printers
SQUIX 8.3



Label printers
XD Q double-sided



Label printers
XC Q two-colored



Print and apply systems
HERMES Q



Print and apply systems
Hermes C two-colored



Tube labeling systems
AXON 1



Print modules
PX Q



Labels and ribbons



Label software
cablabel S3



Label dispensers
HS, VS



Labeling heads
IXOR



Marking lasers
XENO 4



Laser marking systems



Germany

cab Produkttechnik GmbH & Co KG

Karlsruhe

Phone +49 721 6626 0

www.cab.de

France

cab Technologies S.à.r.l.

Niedermörsen

Phone +33 388 722501

www.cab.de/fr

USA

cab Technology, Inc.

Chelmsford, MA

Phone +1 978 250 8321

www.cab.de/us

Mexico

cab Technology, Inc.

Juárez

Phone +52 656 682 4301

www.cab.de/es

Taiwan

cab Technology Co., Ltd.

Taipei

Phone +886 (02) 8227 3966

www.cab.de/tw

China

cab (Shanghai) Trading Co., Ltd.

Shanghai

Phone +86 (021) 6236 3161

www.cab.de/cn

Singapore

cab Singapore Pte. Ltd.

Singapore

Phone +65 6931 9099

www.cab.de/en

South Africa

cab Technology (Pty) Ltd.

Randburg

Phone +27 11 886 3580

www.cab.de/za

cab // more than 500 distribution and service partners in more than 60 countries

